



COMMERCIAL PVC FLOORING

STONE / TEXTILE / WOOD LOOKS

A coordinated surface collection for commercial interiors.



[VIEW PANELWAY ONLINE](#)

Panelway (China) Ltd.

International Marketing & Sales

Suite No. 532B, 5/F, Star House
3 Salisbury Road, Tsim Sha Tsui
Kowloon, Hong Kong

Manufacturing Base · Shandong, China
International Sales & Support · Hong Kong

Mr. Nie

General Manager

Mobile / WhatsApp
+86 185 0081 8227

nie@panelwayaccessfloors.com
www.panelwayaccessfloors.com

STONE GRAIN


PVC FLOORING / TILE COLLECTION

NOMINAL FORMATS

457.2 x 457.2 mm / 600 x 600 mm / 610 x 610 mm

WEAR-LAYER OPTIONS

0.07 / 0.10 / 0.20 / 0.30 / 0.50 mm




HCF1002




HCF1003



HCF2172-18



HCF1005




HCF2172-21



HCF2172-19




HCF8913



HCF2195-1



HCF2195-3

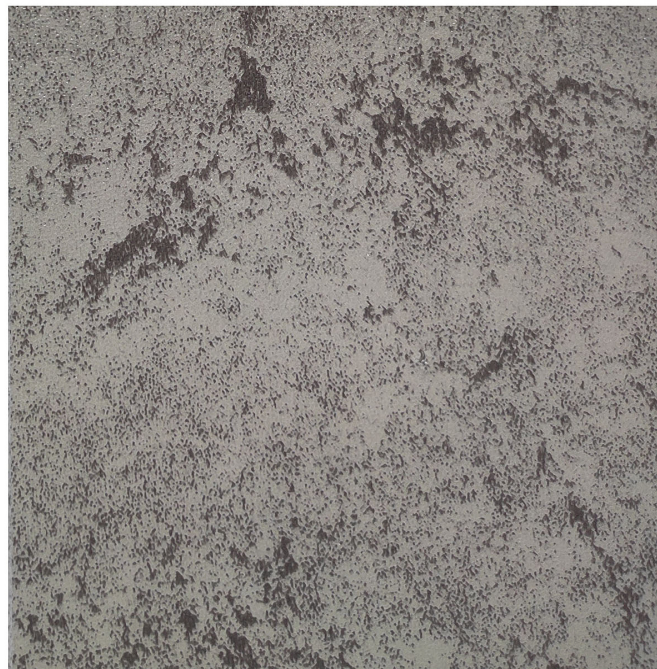

HCF2172-3

TEXTILE GRAIN

PVC FLOORING / TILE COLLECTION

NOMINAL FORMATS


457.2 x 457.2 mm / 600 x 600 mm / 610 x 610 mm

WEAR-LAYER OPTIONS

0.07 / 0.10 / 0.20 / 0.30 / 0.50 mm




HCF8004-3



HCF1017



HCF8094



HCF1025



HCF8146-3



HCF8054




HCF8054-1



HCF8095



HCF8054-4



HCF8054-2

WOOD GRAIN

PVC FLOORING / PLANK COLLECTION / PART 1

NOMINAL FORMATS

152.4 x 914.4 mm / 152.4 x 1219.2 mm

WEAR-LAYER OPTIONS

0.07 / 0.10 / 0.20 / 0.30 / 0.50 mm



HCF7141



HCF7328-2



HCF7142



HCF7020



HCF7143-2



HCF7234-1



HCF7102



HCF7242-3



HCF7101



HCF7234-14

WOOD GRAIN

PVC FLOORING / PLANK COLLECTION / PART 2

NOMINAL FORMATS


152.4 x 914.4 mm / 152.4 x 1219.2 mm

WEAR-LAYER OPTIONS

0.07 / 0.10 / 0.20 / 0.30 / 0.50 mm



HCF-7243-3

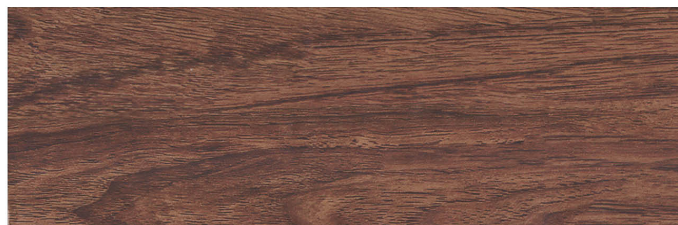

HCF-7246-6



HCF-7280-1



HCF-7284-2




HCF-7301-3




HCF-7305-5



HCF-7307-8

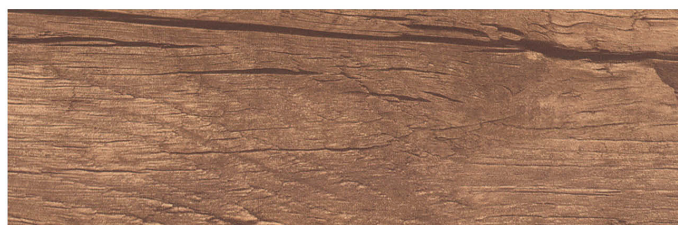

HCF-7309-5

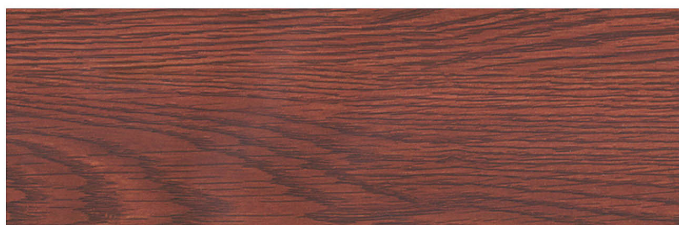

HCF-7310-3



HCF-7310-5

TECHNICAL GUIDE

Selection, installation and care

Product overview

Decorative, multi-layer PVC flooring for interior commercial applications. Select the design, format, total thickness and wear layer to suit the project specification.

PROPERTY	NOMINAL OPTIONS
Tile formats	457.2 x 457.2 mm (18 x 18 in) 600 x 600 mm; 610 x 610 mm
Plank formats	152.4 x 914.4 mm (6 x 36 in) 152.4 x 1219.2 mm (6 x 48 in)
Total thickness	1.2 / 1.5 / 2.0 / 2.5 / 3.0 / 5.0 mm
Wear layer	0.07 / 0.10 / 0.20 / 0.30 / 0.50 mm

Independent test reference

SGS REPORT XMIN2304000061CM01_CN

Issued: 14 April 2023

Tested sample: antistatic PVC flooring, 600 x 600 mm

Static coefficient of friction: 0.74 dry / 0.84 wet

Methods: GB/T 4085-2015, Clause 6.14.4, and

GB/T 4100-2006, Annex M

RESULTS APPLY ONLY TO THE TESTED SAMPLE

Specification and compliance

- 01 Confirm design code, format, total thickness and wear layer.
- 02 Approve a physical sample; screen and print colours may vary.
- 03 Confirm batch, shade, quantity and spare material.
- 04 Obtain current project-required fire, slip, VOC, electrical, acoustic and warranty documents.

INSTALLATION

- Use a sound, smooth, clean and dry substrate.
- Verify moisture, flatness and substrate condition before work.
- Acclimatise materials and follow the adhesive supplier's instructions.
- Use qualified installers and applicable local standards.

ROUTINE CARE

- Remove grit with a dust mop or soft brush.
- Clean with a neutral detergent and controlled moisture.
- Use suitable entrance matting and furniture protection.
- Do not drag sharp or abrasive objects across the surface.

ORDER CONTROL

- Keep design codes and approved samples with the order.
- Inspect goods and batch labels before installation.
- Retain maintenance material from the same production batch.
- Request current technical documents for every project.

Panelway (China) Ltd.

International Marketing & Sales

Suite No. 532B, 5/F, Star House
3 Salisbury Road, Tsim Sha Tsui
Kowloon, Hong Kong

Manufacturing Base · Shandong, China
International Sales & Support · Hong Kong

Mr. Nie

General Manager

Mobile / WhatsApp

+86 185 0081 8227

nie@panelwayaccessfloors.com

www.panelwayaccessfloors.com